


MINI LED Rally Lights Installation Manual

Step 1: Open the hood.


If your MINI already comes with stock halogen rally lights, you will need to replace the stock rally lights with the new LED rally lights. Mount the LED rally lights on the stock brackets and connect the wires to power up the LED rally light.

If your car does not come with stock rally lights, you can still install this product since this LED assembly comes with all of the necessary wires and brackets needed for installation. Depending on your MINI model there may be some grille cutting involved in order to proceed with installation.


This center grille piece shows the two locations on the outer corners where you may have to cut the grille prior to installation.

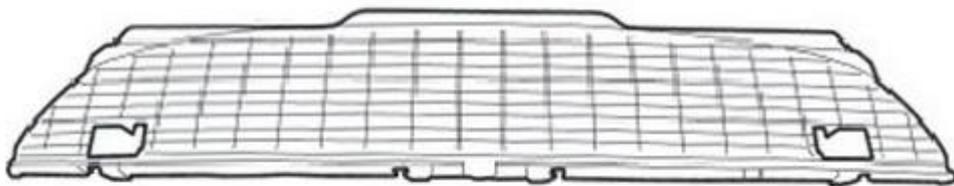

Step 2: Undo the two bolts that are holding the bumper trim and support to the vehicle. Repeat on the other side of the vehicle.

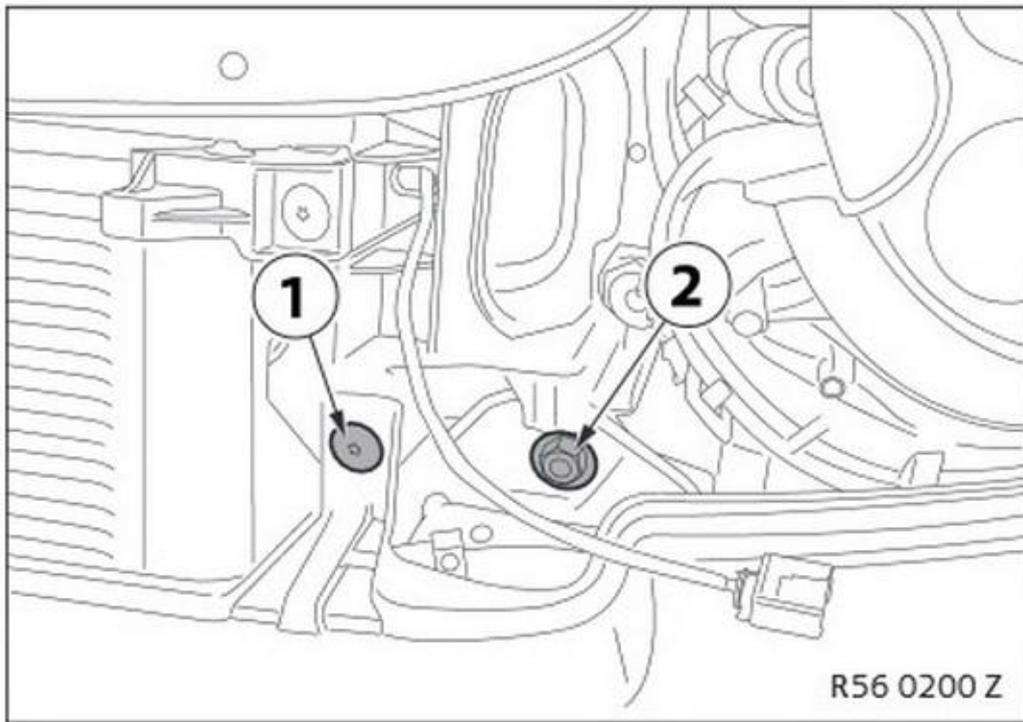


Step 3: Secure the bracket using nuts and bolts. Repeat on the other side.

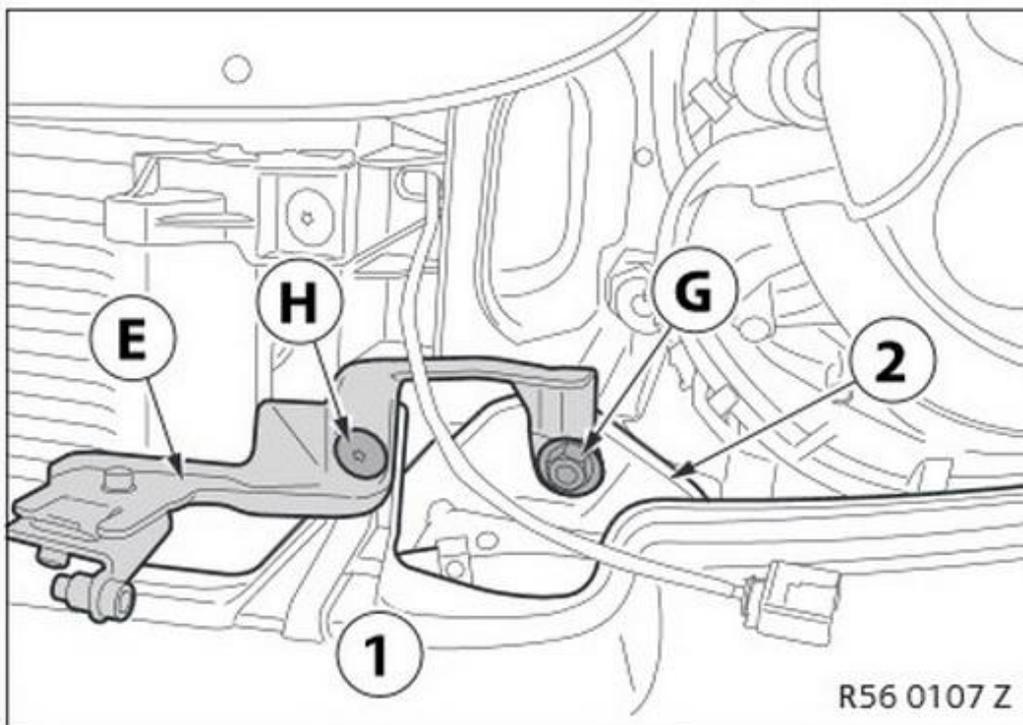


Step 4: **This step is for cars that have a chrome front grille only.**

Place the grille on a protective cover to protect the chrome trim. Use a screwdriver to remove glue from the retaining lugs. Push the retaining lugs downward and remove the chrome trim from the front grille.

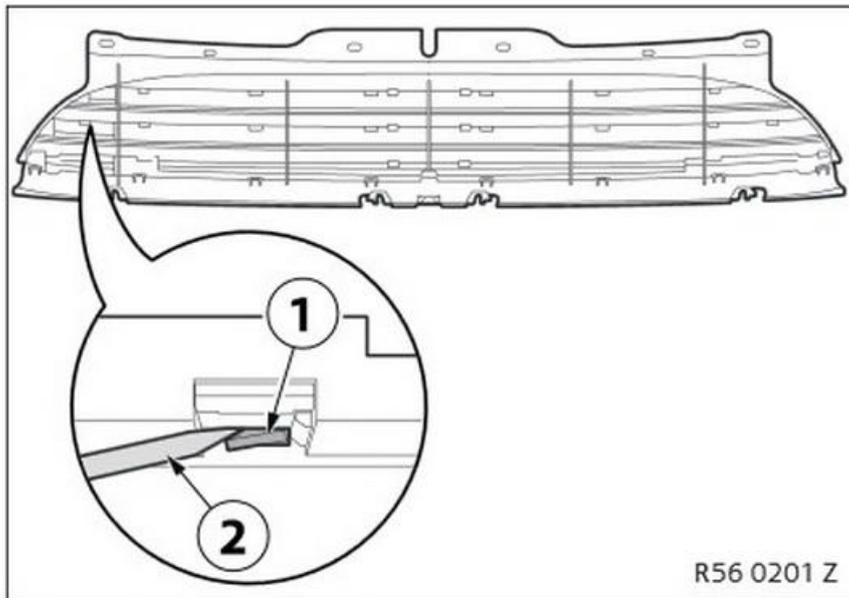

Step 5: Now we will attach the new LED daytime running lamp onto the center grille. Attach the LED rally light with some bolts and washers and secure it onto the brackets.

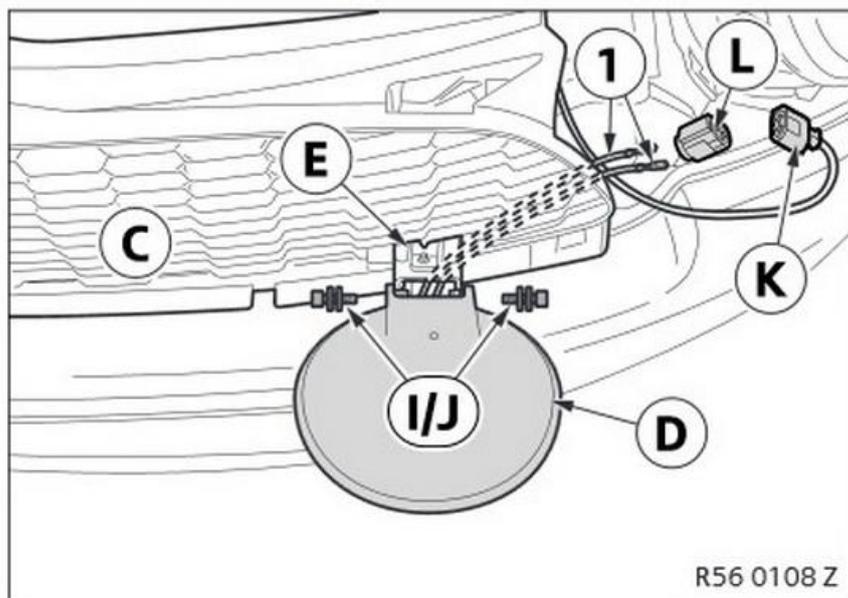

Step 6: Connect the adapters of the LED daytime running lamps to the wiring harness.

Tap the red wire to ACC or any 12V+ power source for the LED halo daytime running light feature.

Plug in the adapter between the stock parking light bulb and the stock parking light harness for the rally driving light.



Test to make sure everything works, put everything back, and enjoy your new MINI Cooper LED rally lights.

